

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 June 2003 (12.06.2003)

PCT

(10) International Publication Number  
**WO 03/048579 A2**

(51) International Patent Classification<sup>7</sup>: **F04C**

(21) International Application Number: **PCT/DK02/00808**

(22) International Filing Date: 2 December 2002 (02.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PA 2001 01801 4 December 2001 (04.12.2001) **DK**

(71) Applicant (for all designated States except US): **KAG HOLDING A/S [DK/DK]**; Frydendalsvej 16, DK-1809 Frederiksberg (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GERSTENBERG, Knud, Aage [DK/DK]**; Frydendalsvej 16, DK-1809 Frederiksberg (DK).

(74) Agents: **RASMUSSEN, Preben et al.**; International Patent-Bureau A/S, Høje Taastrup Boulevard 23, DK-2630 Taastrup (DK).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI,

[Continued on next page]

(54) Title: **SCREW PUMP FOR TRANSPORTING EMULSIONS SUSCEPTIBLE TO MECHANICAL HANDLING**

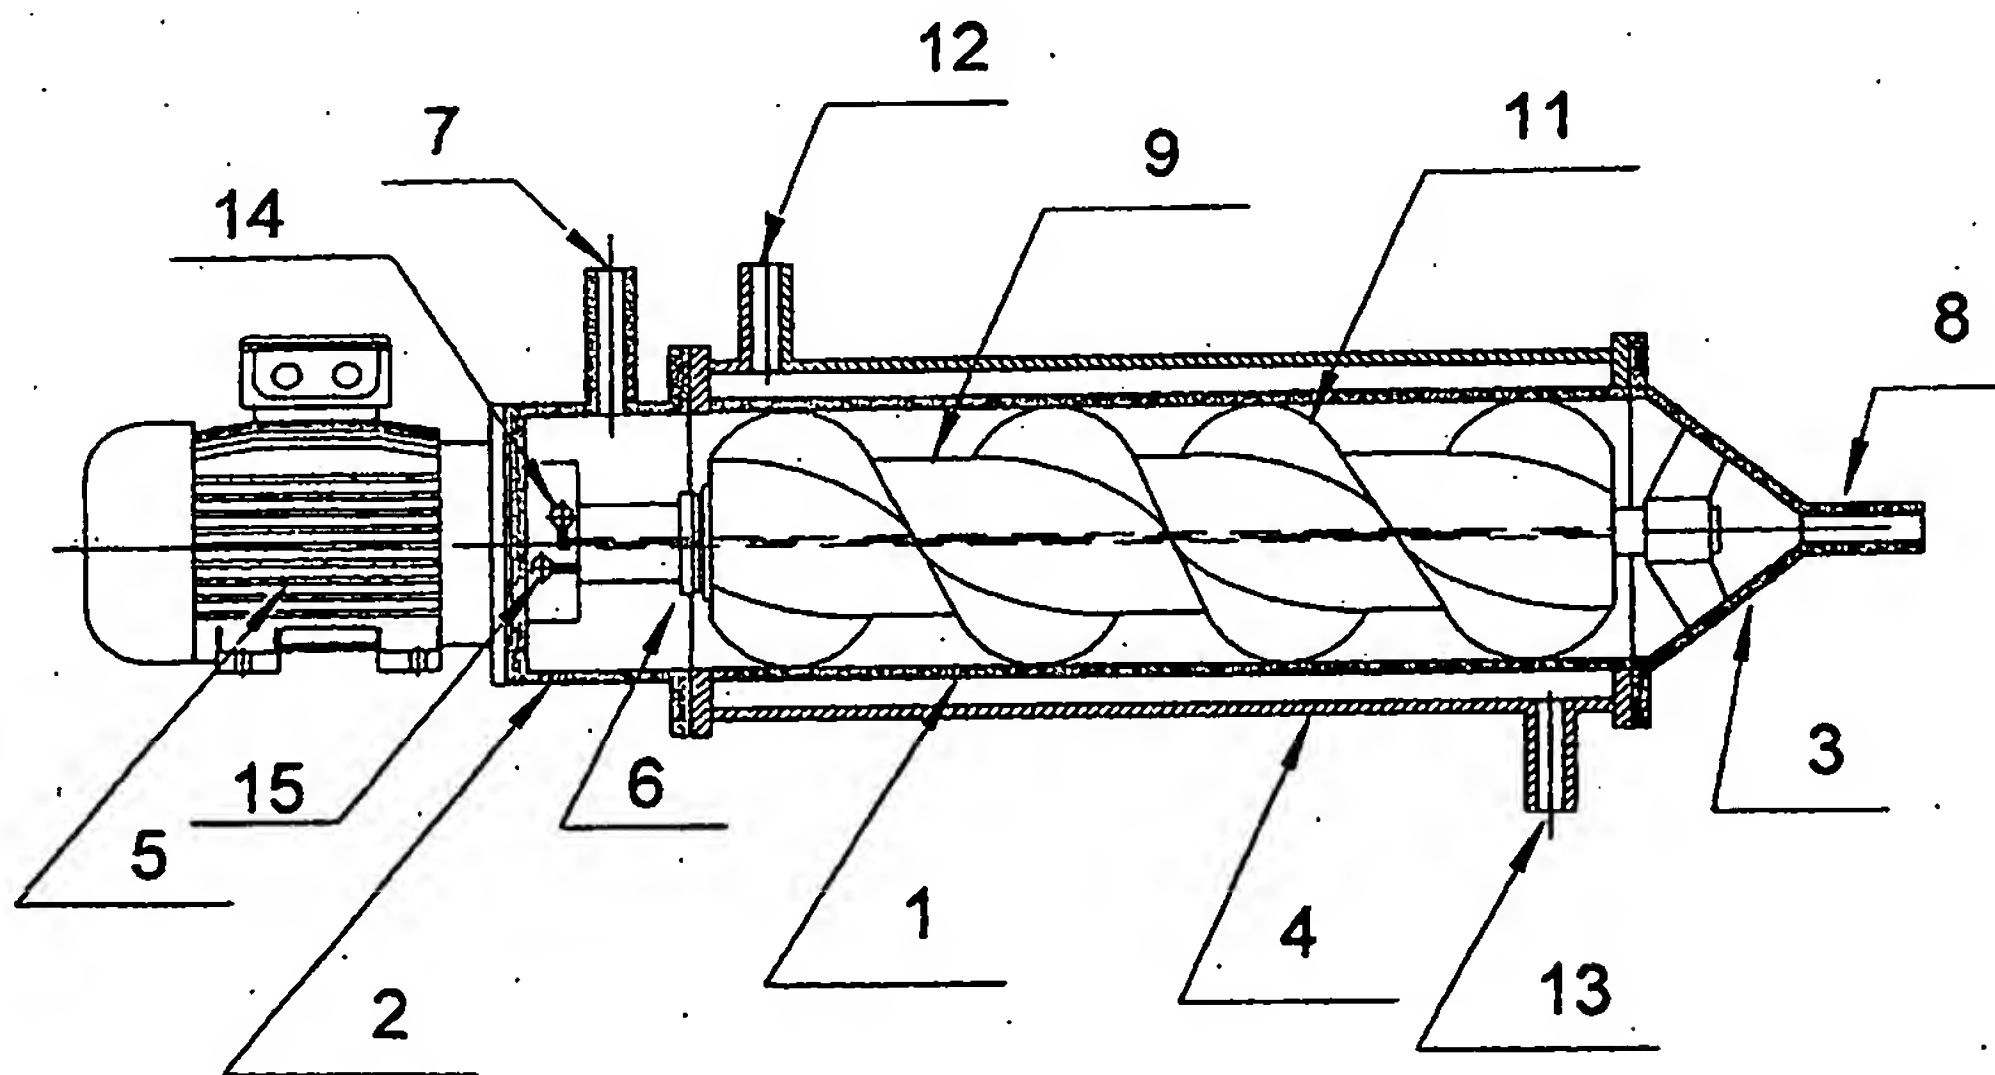

(57) Abstract: A screw pump for transporting a viscous product is described comprising a cylindrical housing connected to a removable bottom piece in one end and a removable cap in the opposite end, a rotor having one or more screw blades connected to a driving motor, an inlet and an outlet wherein the cylindrical housing is provided with a jacket for supply or removal of heat, and the rotor is provided with means for supply or removal of heat. Such a screw pump is suitable for pumping emulsion susceptible to mechanical or temperature damage. Using such a pump e.g. food emulsions manufactured with reduced or without addition of emulsifiers may be transported without mechanical damaging the emulsion.

WO 03/048579 A2



GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



**(43) International Publication Date**  
**12 June 2003 (12.06.2003)**

## PCT

**(10) International Publication Number**  
**WO 2003/048579 A3**


- (51) **International Patent Classification<sup>7</sup>:** **F04C 2/107,**  
F04D 3/02 // B65G 33/14
- (21) **International Application Number:**  
PCT/DK2002/000808
- (22) **International Filing Date:** 2 December 2002 (02.12.2002)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
PA 2001 01801 4 December 2001 (04.12.2001) DK
- (71) **Applicant (for all designated States except US):** KAG  
HOLDING A/S [DK/DK]; Frydendalsvej 16, DK-1809  
Frederiksberg (DK).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** GERSTENBERG,  
Knud, Aage [DK/DK]; Frydendalsvej 16, DK-1809  
Frederiksberg (DK).
- (74) **Agents:** RASMUSSEN, Preben et al.; International  
Patent-Bureau A/S, Høje Taastrup Boulevard 23, DK-2630  
Taastrup (DK).
- (81) **Designated States (national):** AE, AG, AL, AM, AT (util-  
ity model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ (utility model), DE (util-  
ity model), DK (utility model), DM, DZ, EC, EE  
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) **Designated States (regional):** ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**  
— as to applicant's entitlement to apply for and be granted  
a patent (Rule 4.17(ii)) for the following designations AE,  
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH,  
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,

**Declaration under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,

*[Continued on next page]*

- (54) Title:** SCREW PUMP FOR TRANSPORTING EMULSIONS SUSCEPTIBLE TO MECHANICAL HANDLING

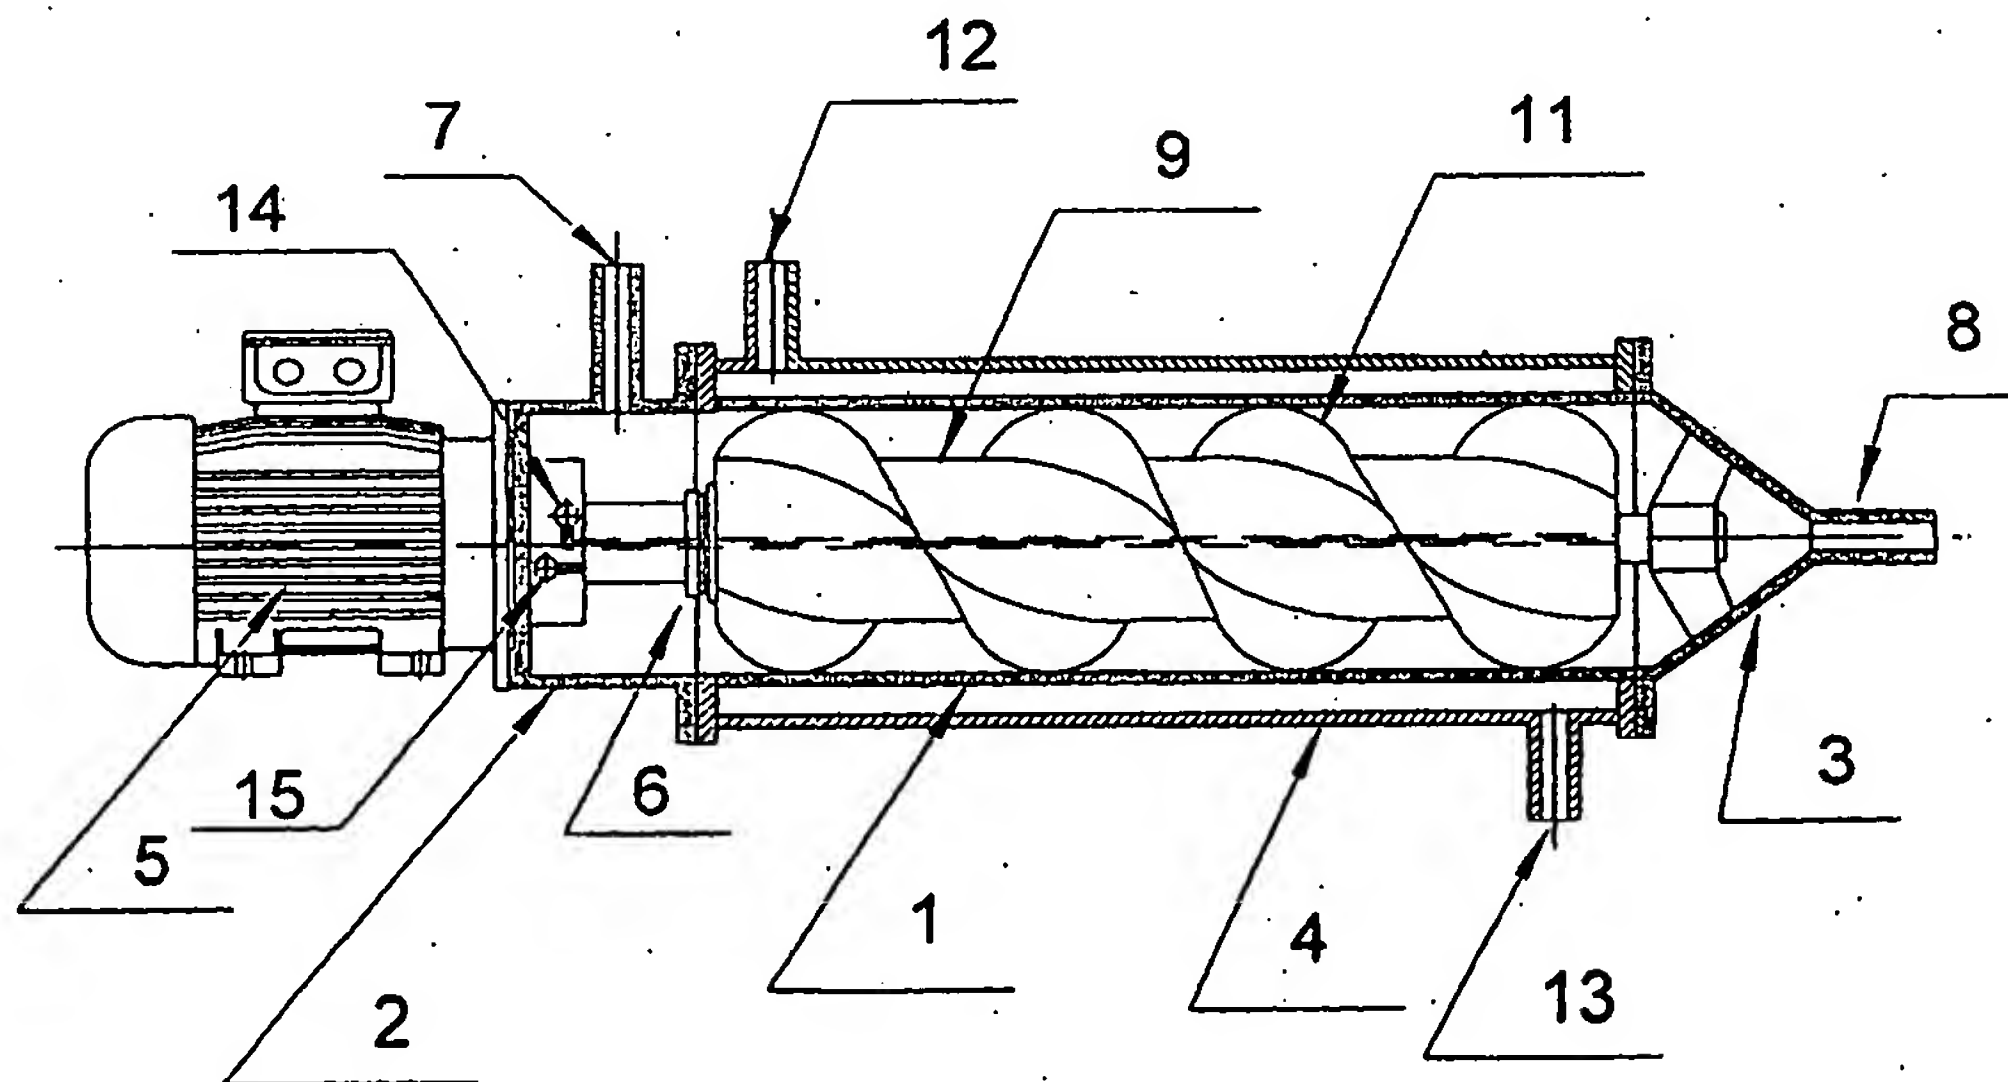

- (57) Abstract:** A screw pump for transporting a viscous product is described comprising a cylindrical housing connected to a removable bottom piece in one end and a removable cap in the opposite end, a rotor having one or more screw blades connected to a driving motor, an inlet and an outlet wherein the cylindrical housing is provided with a jacket for supply or removal of heat, and the rotor is provided with means for supply or removal of heat. Such a screw pump is suitable for pumping emulsion susceptible to mechanical or temperature damage. Using such a pump e.g. food emulsions manufactured with reduced or without addition of emulsifiers may be transported without mechanical damaging the emulsion.



KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

— with international search report

(88) Date of publication of the international search report:  
29 April 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## SCREW PUMP FOR TRANSPORTING EMULSIONS SUSCEPTIBLE TO MECHANICAL HANDLING

5           The invention relates to a screw pump for transport of emulsions susceptible to mechanical handling. In particular the invention relates to a particular design of a screw pump that enables it to transport emulsions, such as emulsions used in the  
10 food manufacture, without damaging the emulsions due to the mechanical treatment of the emulsions.

### Background for the invention

15

Emulsions are mixtures of at least two immiscible phases comprising a continuous phase and one or more discontinuous phases present as small spheres in the continuous phase.

20

Often the emulsions are composed of an oil/fat phase and a water phase and optionally a gas phase.

Emulsions are widely used within food industry in products such as butter, spread, dressings and toppings; as well as within the non-food industry in  
25 products such as lotions, crèmes and ointments.

Even though emulsions inherently are inhomogeneous on the microscopic level it is essential for the perception of the emulsions that they appear homogeneous for the consumer both with respect to the  
30 visual appearance and the texture of the product.

For emulsions the properties are to a large extent determined by the size of droplets of the discontinuous phase(s) as well as the distribution. Both the visual appearance as well as properties as viscosity, texture, mouth feel, etc, often referred to  
35 as functional properties, is influenced by the size and distribution of the droplets of the discontinuous phase(s).



Because emulsions are composed of at least two immiscible phases there is a risk that an emulsion may break and the two different phases may emerge as visible different components in the product, or that droplets of the discontinuous phase coalesce forming larger droplets with the consequence that the properties of the product changes. Breakdown of an emulsion may appear in different ways depending on the extent of the break down of the emulsion and the properties of the emulsion. Breakdown of the emulsion may appear as streaks having a changed colour in the product, parts of the product having different colour, altered texture of the product or a changed mouth feel of the product. Any of these different appearances of the breaking of the emulsion results in a lower quality product and should therefore be avoided if possible.

In the case of gas being on of the phases in said emulsion damages may appear as gas droplets of an unacceptable size such as above e.g. 1 mm across or more.

Because the different phases of the emulsions react different to changing physical parameters emulsions are susceptible to influences of physical parameters such as temperature and pressure with the consequence that the visible streaks or areas of the emulsion having changed properties emerge and the product becomes less palatable.

These properties of the emulsions require the process equipment to have little impact on the emulsion after the formation during the manufacture of said emulsions in order to obtain an acceptable product. In particular influence on the emulsions by excessive pressure and temperature have to be avoided.

In US 4,938,660 a screw pump for pumping viscous fluids is described. The pump includes a stator and a rotor lying coaxially with each other and has respective surfaces, which lie seal-tight against each other.

WO 99/19630 and WO 99/19631 disclose screw vacuum pumps where the rotors are provided with a cooling system inside the rotors.

In order to improve the stability of emulsions additives such as emulsifiers are often added to the emulsion, with the consequence that the risk for damaging the emulsion is reduced even though it may not be completely avoided.

In the last year's consumers' acceptance of additives, particular in food products has declined. Therefore there is an increasing desire and demand for food products containing low amount of additives or even completely without additives. This has led to productions of food emulsions, such as dairy products, butter, margarine products, margarine, spread, dressings and toppings containing smaller amounts of emulsifiers, preferably completely without additions of emulsifiers, with the consequence that these products are very susceptible to temperature and pressure influences, which makes them difficult to handle using existing process equipment without damaging of the products.

The object of the present invention is to provide new improved screw pumps for susceptible emulsions, which reduce the risk for damaging a susceptible emulsion during pumping.

30

#### Short description of the invention

The inventors have surprisingly realized that the above object may be met by a screw pump for transporting a viscous product comprising a cylindrical housing (1) connected to a removable bottom piece (2) in one end and a removable cap (3) in the opposite end, a rotor (9) having one or more screw blades

(11) connected to a driving motor (5), an inlet (7) and an outlet (8), wherein the cylindrical housing (1) is provided with a jacket (4) for supply or removal of heat, and the rotor (9) is provided with means for supply or removal of heat.

Such a screw pump according to the invention has shown to be able to transport of a viscous fluid in particular an emulsion in a gentle way without excessive influences of heat or pressure to the product.

In one embodiment the screw pump according to the invention is used to transport of emulsions, in particular within the food industry.

The design and operation of the screw pump secures that the pressure of the product entering the pump is essentially maintained throughout the pump. Further the jacket (4) surrounding the cylindrical housing and the means for supply or removal of heat inside the rotor (9) secures that the temperature of the product may be kept within narrow limits during the transport, which combined secures that said susceptible emulsions may be transported in a gentle way using this pump with low risk for damaging the emulsion.

25

#### Short description of the drawing

In the drawing one embodiment of the screw pump according to the invention is shown. The cylindrical housing (1) is connected to a removable bottom piece (2) provided with an inlet for the product (7), and a removable cap (3) provided with an outlet for the product (8). The rotor (9) is connected to the driving motor (5) via a shaft connected to the bottom piece via a common shaft seal (6). The rotor (9) is provided with two screw blades (11). Surrounding the



cylindrical housing (1) is a jacket (4) for supply of removal of heat provided with an inlet (12) and an outlet (13) for a heat transfer medium. The rotor is provided with an inlet (14) and an outlet (15) for a heat transfer medium connected via a channel inside the rotor, indicated in the figure by dashed lines.

### Detailed description of the invention

10

The term emulsion according to the invention is to be understood as emulsions in the general understanding of the term. In particular the screw pump according to the present invention is useful for emulsions comprising an oil/fat phase and a water phase and optionally a gas phase. Such emulsions may in relation with transport be regarded as fluids having high viscosities.

20 As the person skilled in the art will appreciate pumping of a fluid depends on the rheological properties of said fluid.

The emulsions to be used in the pumps according to the invention are emulsions having viscosities higher than 100 cP, preferably higher than 500 cP and most preferred higher than 1000 cP.

Such emulsions usually have viscosities that are strongly dependent on the temperature, where the viscosity decreases when the temperature increases.

30 Further the emulsions often behave as non-Newtonian fluids, i.e. the viscosity is dependent of the shear force being applied to the emulsion.

The cylindrical housing (1) of the pump according to the invention has a circular cross section and a length determined by the distance the emulsion has to be transported. It is important that the inner

cross section of the cylindrical housing has same area in the complete length in order to secure that no excessive pressure increase or decrease occur. In some embodiments a small difference between the pressure at the inlet and the outlet of the screw pump may be acceptable. Preferably this difference is a decrease of pressure from the inlet to the outlet of the screw pump.

The inner surface of the cylindrical housing has to be smooth in order to avoid deposits of emulsion in irregularities in the surface. Further such a smooth surface is easier to clean which is advantageous, particular within the food industry. Preferably the inner surface is a highly polished surface, most preferred highly polished steel.

Dependent of the particular use the housing may have a length of several meters, such as in the range of 0.2 - 10 m, preferably 0.5 - 5 m.

The rotor is arranged concentrically in the housing. In principle the means for supply or removal of heat arranged inside the rotor may be any means that is capable of delivering or removing heat from the rotor. Several such means will be known for the person skilled in the art. Examples of such means include electrical heating elements and channels for passage of a heat transfer medium. The means for supply or removal of heat may be provided in only a part of the length of the rotor or it may be extended to the total length of the rotor. More than one means for supply or removal of heat may be provided in a rotor, for example in different sections of the rotor in order to be able to have different temperatures in different parts of the housing, or means for removal of heat as well as means for supply of heat may be provided.

One or more screw blades may be provided on the rotor. Even though there may not be an upper limit for the number of screw blades arranged on the rotor

it is preferred that the number of screw blades is in the range of 1-10, preferably 1-6, and most preferred 2-5. In the case that more than one screw blade is provided they are preferably placed equidistantly around the rotor, i.e. two screw blades are placed in an angle of  $180^\circ$ , three in an angle of  $120^\circ$ , four in an angle of  $90^\circ$  etc.

The screw blades may be designed in any known shape. It is preferred that the screw blades are formed in a way so that maximal force applied to the product being pumped is applied in the axial direction and minimal force is applied in the radial direction.

A foldable screw blade is a preferred example of such a design. Foldable screw blades are designed so that the tangent to the screw line becomes propulsion lines. Usually, only the part of the tangent from the point of contact to one of the points of intersection with the cylindrical housing is used. Such screw blades are further characterised in that they in any position have same inclination with planes perpendicular to the screw axis.

The distance between the screw blade(s) and the cylindrical housing is preferably low in order to secure that the amount of material being pumped that is able to escape the pumping between the screw blades and the cylindrical housing is low. The distance between the screw blades and the cylindrical housing may be selected in the range of 0.01 mm and 2 mm, preferably in the range of 0.01 to 1 mm and even more preferred in the range of 0.03 and 0.2 mm.

The edges of the screw blades function to keep the inner surface of the cylindrical housing free of residual material. In one embodiment the edges of the screw blades are made of or provided with a cladding of a hard material, preferably a hard metal.

Channels for the product in the screw pump ac-

According to the invention is delimited by the inner surface of the housing, the rotor and the screw blade(s). It is essential for the present invention that the area(s) of the cross section of these channels are the same through the length of the screw pump. In this way it is avoided that pressure differences between different sections of the screw pump arise.

The feature that the cross section of any channel along the screw pump is constant is secured by the fact that the inner diameter of the cylindrical housing and the diameter of the rotor are constant as well as the design of the screw blades.

The height of the channels i.e. the difference between the inner radius of the cylindrical housing and the radius of the rotor is an important factor in determining the rate of heat transfer between the material in the centre of the channel and the heat transfer planes, i.e. the inner surface of the cylindrical housing and the rotor. The person skilled in the art will appreciate that said rate of heat transfer will be higher for a low height compared to a higher height. Further the person skilled in the art will appreciate that for a fluid having a very high viscosity transport of heat will be slower than for fluids having a lower viscosity.

The inner diameter and the diameter of the rotor are preferably selected so that the height of the channels is sufficient low to secure a suitable heat transfer between the fluid and the heat transfer planes.

The ratio of the diameter of the rotor and the diameter of the inner surface of the cylindrical housing may be selected in the range of 0.25 to 0.98. Preferably the ratio is selected in the range of 0.5 to 0.95, more preferred in the range of 0.65 to 0.9.

The driving force for the rotor is provided with a motor connected to the rotor via a shaft. Such

motors and shafts as well as bearings, gaskets sealing rings etc. for such a motor and shaft is well known within the area. Preferably the motor is an electrical motor.

5 A jacket is provided on the outside of the cylindrical housing in order to supply or remove heat. The jacket may in principle be any type of such jackets known within the area that is able to provide the desired transport of heat. In operation a heat transfer medium is passing through the jacket via an inlet and an outlet. Even though the heat transfer via the cylindrical housing is explained mainly as a jacket passed by a heat transfer medium, the person skilled in the art will appreciate that other means for transfer of heat known within the art may also be applicable according to the present invention.

The heat transfer medium may be any suitable medium for transfer of heat. It is preferred that the heat transfer medium is an aqueous medium, preferably water. The heat transfer medium used in the jacket on the cylindrical housing may be the same or a different medium than the medium used in the means for supply of removal of heat provided in the rotor.

Screw pumps according to the present invention may in principle be used for pumping any emulsion that is susceptible to mechanical or temperature damage. The screw pump is particular suited for pumping emulsion comprising oil or fat, water and optional a gas. The dry matter in said emulsion may be found in the range of 0-90%.

As examples of such emulsions can be mentioned dairy products, butter, margarine, margarine products, spread, mayonnaise, dressings, toppings, dough, creams, lotions, ointments etc. Preferably the emulsion is a food.

Such emulsions are susceptible to damage by mechanical handling or by exposure to high or low temperatures, particular if such emulsions are manufac-



tured having a low or no content of emulsifiers.

Further the rheological properties of such emulsions are highly dependent on the temperature, where a higher temperature generally leads to a lower viscosity.

Viscosities of the emulsions to be pumped by the screw pump according to the invention is generally higher than 100 cP, preferably higher than 250 cP.

During operation the rotational speed of the rotor may be in the range of 10 - 800 rpm, preferably 25- 500 rpm in order to secure a low mechanical burden on the product.

The temperature of the product is generally sufficient high to secure that the viscosity is suitable to enable pumping of the product, but sufficient low to avoid damaging the emulsion.

For food emulsions the temperature is generally within the range of -25 to 85°C, preferably 0 to 50°C, more preferred in the range of 10 to 40°C.

In one embodiment the screw pump according to the invention is operated so that the temperature in the proximity of the inner surface of the cylindrical housing is different from the temperature in the proximity of the rotor. By operating the screw pump according to the invention in this way different viscosities may be obtained at different locations in the pump.

For example may the temperature of the jacket be adjusted to be low in order to obtain a high viscosity reducing the amount of emulsion that escapes between the screw blades and housing, whereas the temperature of the rotor may be adjusted to a higher temperature in order to provide a lower viscosity of the emulsion next to the rotor and thereby facilitate transport of the emulsion.

The screw pump is operated so that essentially

no pressure gradient is formed between the inlet and the outlet.

The screw pump according to the invention is now described in further details in the following examples, which are provided only for illustration of the invention and should not be understood as limiting in any way.

10

### Examples

For the examples a screw pump having an inner diameter of the cylindrical housing of 105 mm and a diameter of the rotor of 83 mm was used, provided with a jacket around the cylindrical housing and channels inside the rotor. Heat transfer medium was water for both the jacket and the channels in the rotor.

20

#### Example 1.

Water in oil emulsion.

25

Dry matter	84 % (w/w)
Viscosity	560 cP
Inlet temperature	24°C
Outlet temperature	12°C
30 Pressure	4.6 bar, absolute pressure
Rotational speed	240 rpm

The emulsion was pumped and simultaneously cooled without damaging of the appearance and the functional properties of the emulsion.

35

12

**Example 2.**

Water in oil emulsion.

5	Dry matter	75 % (w/w)
	Viscosity	820 cP
	Inlet temperature	30°C
	Outlet temperature	16°C
	Pressure	5.6 bar, absolute pressure
10	Rotational speed	240 rpm

The emulsion was pumped and simultaneously cooled without damaging of the appearance and the functional properties of the emulsion.

15

**Example 3.**

Water in oil emulsion.

20

	Dry matter	42.69 % (w/w)
	Viscosity	350 cP
	Inlet temperature	38°C
	Outlet temperature	18°C
25	Pressure	3.6 bar, absolute pressure
	Rotational speed	240 rpm

The emulsion was pumped and simultaneously cooled without damaging of the appearance and the functional properties of the emulsion.

30

**Example 4.**

35

Water in oil emulsion containing gas.

13

Dry matter	84.38 % (w/w)
Viscosity	176 cP
Temperature	20°C
N <sub>2</sub> injected	13 g/kg emulsion
5 Pressure	4 bar, absolute pressure
Rotational speed	250 rpm

The emulsion was pumped without damaging of the appearance and the functional properties of the emul-  
10 sion.

#### Example 5.

15 Water in oil emulsion containing gas.

Dry matter	75.66 % (w/w)
Viscosity	276 cP
Temperature	20°C
20 N <sub>2</sub> injected	22 g/kg emulsion
Pressure	4 bar, absolute pressure
Rotational speed	250 rpm

The emulsion was pumped without damaging of the appearance and the functional properties of the emul-  
25 sion.

#### Example 6.

30

Water in oil emulsion containing gas.

Dry matter	55.18 % (w/w)
Viscosity	460 cP
35 Temperature	14°C
N <sub>2</sub> injected	28 g/kg emulsion
Pressure	4 bar, absolute pressure

14

Rotational speed 250 rpm

The emulsion was pumped without damaging of the appearance and the functional properties of the emulsion.



## P A T E N T   C L A I M S

1. Screw pump for transporting a viscous product susceptible to mechanical damage comprising a cylindrical housing (1) connected to a removable bottom piece (2) in one end and a removable cap (3) in the opposite end, a rotor (9) having one or more screw blades (11) connected to a driving motor (5), an inlet (7) and an outlet (8), characterized in that the cylindrical housing (1) is provided with a jacket (4) for supply or removal of heat, and the rotor (9) is provided with means for supply or removal of heat.

2. Screw pump according to claim 1, where the viscous product is an emulsion.

3. Screw pump according to claim 1 or 2, wherein the means for supply or removal of heat in the rotor (9) is one or more channels inside the rotor connected to an inlet (14) and an outlet (15) for a heat-transfer medium.

4. Screw pump according to any of claim 1 to 3, wherein the distance between the screw blades (11) and the cylindrical housing is between 0.01 and 1 mm.

5. Screw pump according to claim 4, wherein the distance between the screw blades (11) and the cylindrical housing is between 0.03 and 0.2 mm.

6. Screw pump according to any of claims 1-5, wherein the one or more screw blades (11) are formed as foldable screw blades.

7. Screw pump according to any of claims 1-6, wherein the edge of the one or more screw blades (11) are provided with cladding of a hard metal.

8. Screw pump according to any of claims 1-7, wherein the ratio of the diameter of the rotor (9) and the inner diameter of the cylindrical housing is in the range of 0.5 - 0.95.

9. Screw pump according to claim 8, wherein said ratio is in the range of 0.65-0.9.

10. Use of a screw pump according to any of claims 1-9 for transport of an emulsion susceptible to mechanical damage having a viscosity higher than 100 cP.

5 11. Use according to claim 10, where the emulsion is an emulsion comprising an edible fat and water.


12. Use according to claim 10 or 11, where the emulsion further comprises a gas.

10 13. Use according to any of claims 10-12, where the emulsion is selected among: dairy products, margarine, spread, mayonnaise, dressing, toppings and dough.

14. Use according to any of the claims 10 to 15 13, where the product during the transport is kept at a temperature of between -25 and 85°C.

15. Use according to claim 14, where the product is kept at a temperature in the range of 0-50°C.

16. Use according to any of the claims 10-15, 20 where the rotor (9) rotates with a speed of rotation of 10 to 800 rpm.

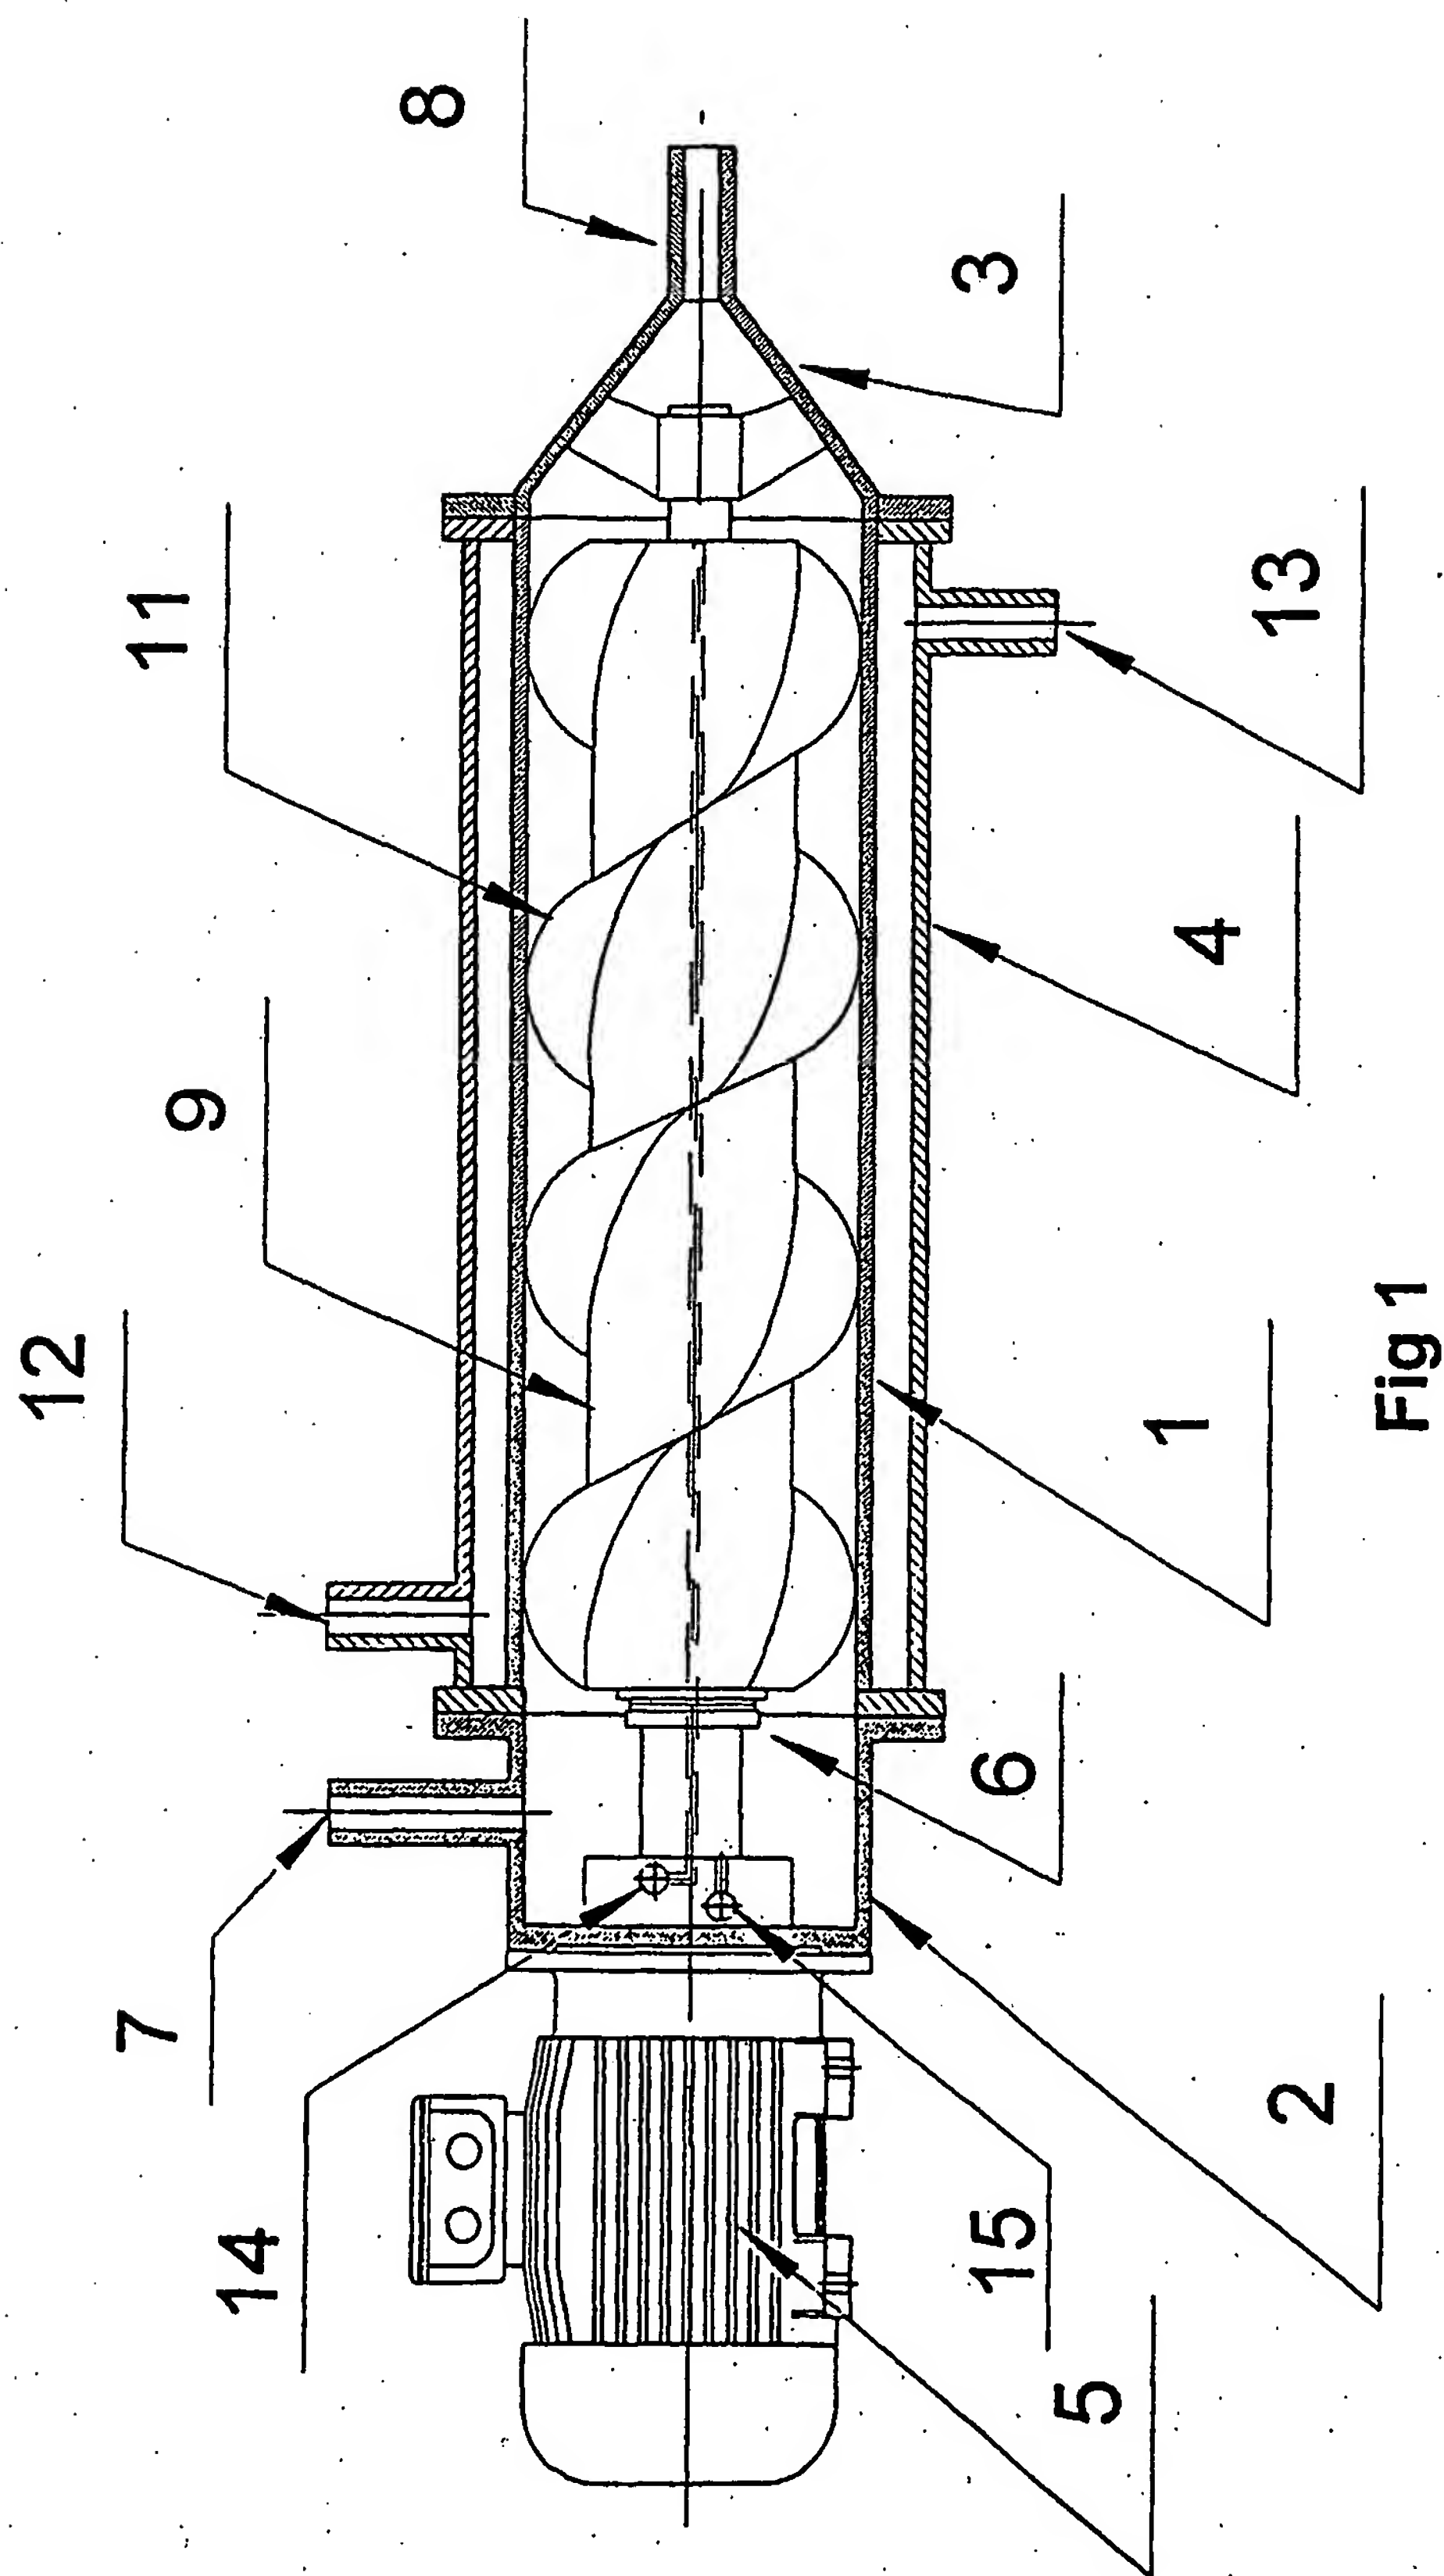

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/DK 02/00808

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F04C2/107 F04D3/02 //B65G33/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F04C F04D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 35135 A (J S MASKINFABRIK A S ;SOERENSEN FREDDY (DK)) 13 August 1998 (1998-08-13) page 15, line 15 -page 18, line 1; figures 12A-13	1-6,8-16
Y	---	2,7
Y	US 5 601 414 A (DIRE JOHN R) 11 February 1997 (1997-02-11) column 1, line 22-24; figure 1	2
Y	---	7
	GB 1 306 185 A (GEBR BOHLER & CO. AKTIENGESELLSCHAFT) 7 February 1973 (1973-02-07) claims 1,2; figure 2 -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

11 March 2003

Date of mailing of the international search report

10 APRIL 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

LENA NILSSON/JA A

## INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/DK 02/00808

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9835135	A	13-08-1998	AT 206501 T	15-10-2001
			AU 5749498 A	26-08-1998
			DE 69801921 D1	08-11-2001
			DE 69801921 T2	13-06-2002
			WO 9835135 A1	13-08-1998
			DK 1015735 T3	28-01-2002
			EP 1015735 A2	05-07-2000
-----				
US 5601414	A	11-02-1997	CA 2183303 A1	26-03-1997
-----				
GB 1306185	A	07-02-1973	AT 295273 B	27-12-1971
			AT 295274 B	27-12-1971
			AT 295275 B	27-12-1971
			BE 762573 A1	16-07-1971
			CA 941562 A1	12-02-1974
			CH 514431 A	31-10-1971
			DE 2102754 A1	12-08-1971
			ES 387988 A1	01-06-1973
			FR 2078054 A5	05-11-1971
			NL 7101063 A	10-08-1971
			CH 514430 A	31-10-1971
			DE 2102755 A1	12-08-1971
			CH 515119 A	15-11-1971
			DE 2102756 A1	12-08-1971
			TR 16892 A	01-09-1973
			ZA 7100528 A	27-10-1971
-----				